

- A Rods 14pcs
- B Rods 3pcs
- C Zig-Zag Rods 2pcs
- D Rod Holders 4 pcs
- E Rod Holders 4 Pcs
- Wing Holders 4 pcs
- Wheels 4pcs
- Base Unit 2 pcs
- Double Bars Main Structure

Note:

X - Use longest screws with washers and nuts
 y - Use medium screws with washers and nuts
 z - (Others) Use shortest screws

Allen key and spanner provided.


Model: EH6000

Installation Guide



A Rod


To enable movement of this part, do not over tighten this nut.

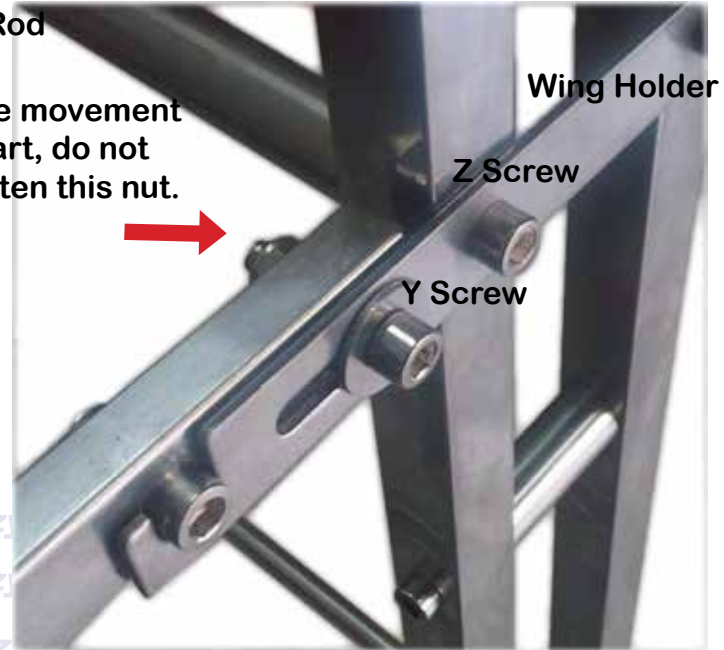

Wing Holder

Z Screw

Y Screw

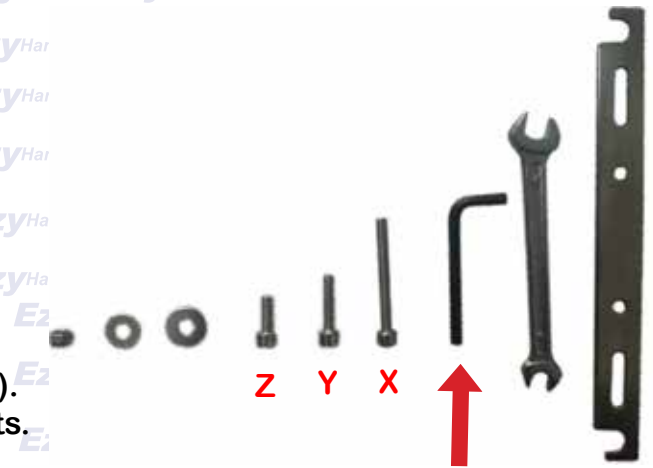

Z Y X

Allen Key

Wing Holder

1. Install all B Rods into Base Units (Use Z screws).
2. Attach Double Bars Main Structure to Base Units. (Use X screws with washers and nuts)
3. Attach all 4 wing holders with A Rods
4. Install D Rod Holder and E Rod Holders with A Rods. (Zig-Zag Rods (2pcs) are installed on the top level, the most outer rod)

Note:

- X - Use longest screws with washers and nuts
- y - Use medium screws with washers and nuts
- z - (Others) Use shortest screws

Allen key and spanner provided.